

TECHNICAL DATA SHEET

Ø250 EF MANŞON | Ø250 EF COUPLER

EF MANŞON

PE100 SDR11

Enjeksiyon (400mm'ye kadar)

4mm bağlantı pimi

Kırılabilir orta stopper (63mm'ye kadar)

16 Bar Su

10 Bar Gaz

EF COUPLER

PE100 SDR11

Injected (up to 400mm)

4 mm pin connectors

Removable center stopper (up to 63mm)

16 Bar Water


10 Bar Gas



TYPE-A



TYPE-B

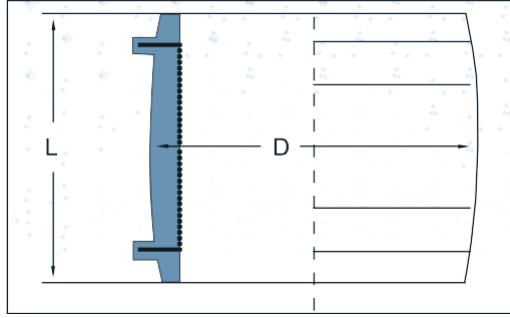

Welding Barcode
D DÖKERLER



950404342503400666780545

Ø 250 EF COUPLER SDR11-17

40 V 780 SEC.

C.T.: 30 MIN.



d mm	ÜRÜN TİPİ (PRODUCT TYPE)	D mm	L mm	AĞIRLIK (WEIGHT) kg	KUTU (BOX) ADET/PCS	UYUMLULUK COMPATİBİLİY SDR
250	TYPE-A	295.8	229.5	3.95	2	11 - 17

Uygulanan Kimyasal ve Mekanik Deneyler / Chemical and Mechanical Experiments Applied

Test Method	Test standard	Reference	Unit	Acceptability
Determining the density (Method A)	TS EN ISO 1183-1	≥ 0.930	g/cm ³	Suitable
Melt Flow Index (MFI)	TS EN ISO 1133-1	0.2-1.4	g/10 min	Suitable
Oxidation Induction Time (OIT)	TS EN ISO11357-1 TS EN ISO11357-6	≥ 20	min	Suitable
Carbon Black Content	TS ISO 6964	2.0-2.5	%	Suitable
Carbon Black Dispersion	TS ISO 18553	≤3.0	%	Suitable
Determination of the Resistance to Internal Pressure (20 °C, 100 h)	TS EN ISO 1167-1/4	12,0	MPa	Suitable
Determination of the Resistance to Internal Pressure (80 °C, 165 h)	TS EN ISO 1167-1/4	5,4	MPa	Suitable
Determination of the Resistance to Internal Pressure (80 °C, 1000 h)	TS EN ISO 1167-1/4	5,0	MPa	Suitable

PREPARED BY / HAZIRLAYAN	APPROVED BY / ONAYLAYAN
QUALITY CONTROL ENGINEER /KALİTE KONTROL MÜHENDİSİ NURETTİN BANER	PRODUCTION MANAGER / ÜRETİM MÜDÜRÜ SERKAN KOCAOĞLU